


UNIDENTIFIED

386DX NON-CACHE MAINBOARD (PQFP)

Processor	80386DX
Processor Speed	25/33/40MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	64MB (32MB on external memory cards)
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	254mm x 218mm
I/O Options	External memory cards (2)
NPU Options	80387DX/3167

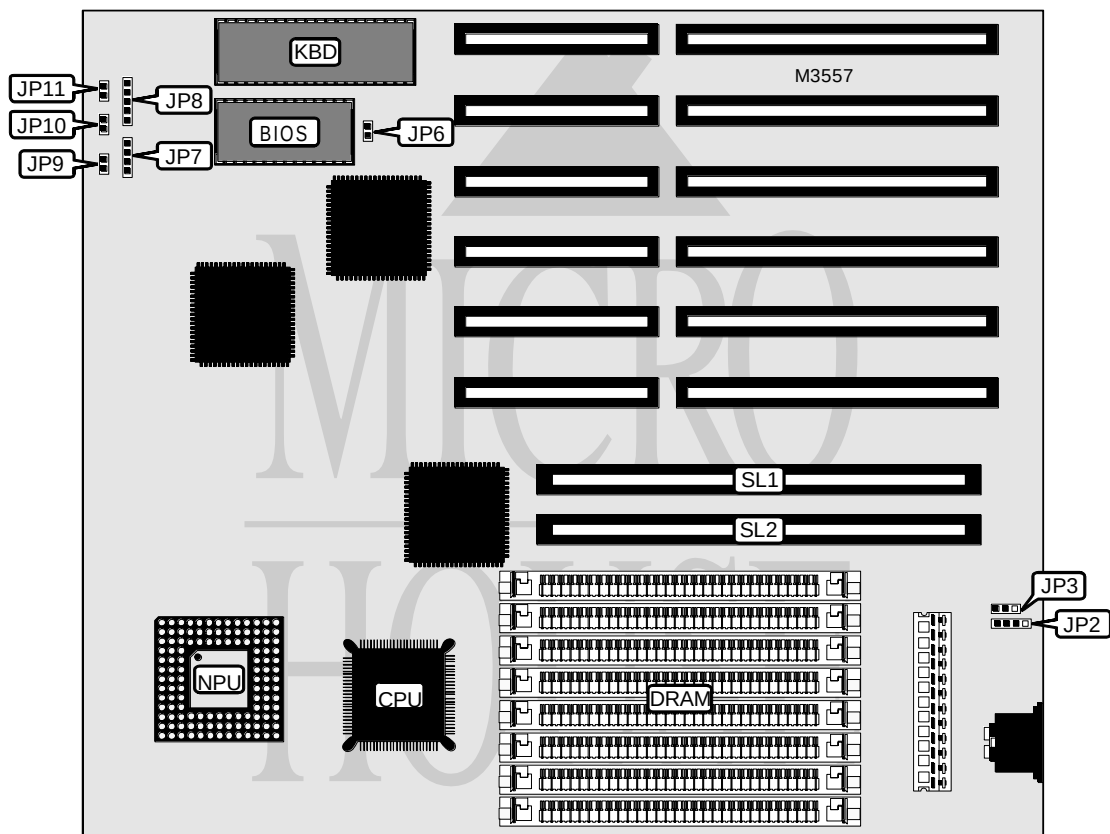

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Turbo switch	JP10
Speaker	JP7	Turbo LED	JP11
Power LED & keylock	JP8	External memory card	SL1 & SL2
Reset switch	JP9		

Continued on next page. . .

UNIDENTIFIED

386DX NON-CACHE MAINBOARD (PQFP)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP3	Pins 1 & 2 closed
CMOS memory clear	JP3	Pins 2 & 3 closed
Monitor type select color	JP6	Closed
Monitor type select monochrome	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9
Note: The location of banks 0 & 1 are unidentified. To increase memory beyond 32MB, install external memory card(s).		