


# MEMOREX TELEX CORPORATION 7270

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	8MB
<b>Maximum Video Memory</b>	Unidentified
<b>Cache</b>	32KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	Floppy drive interface, parallel port, PS/2 mouse port, serial port, VGA port
<b>NPU Options</b>	80387DX/3167

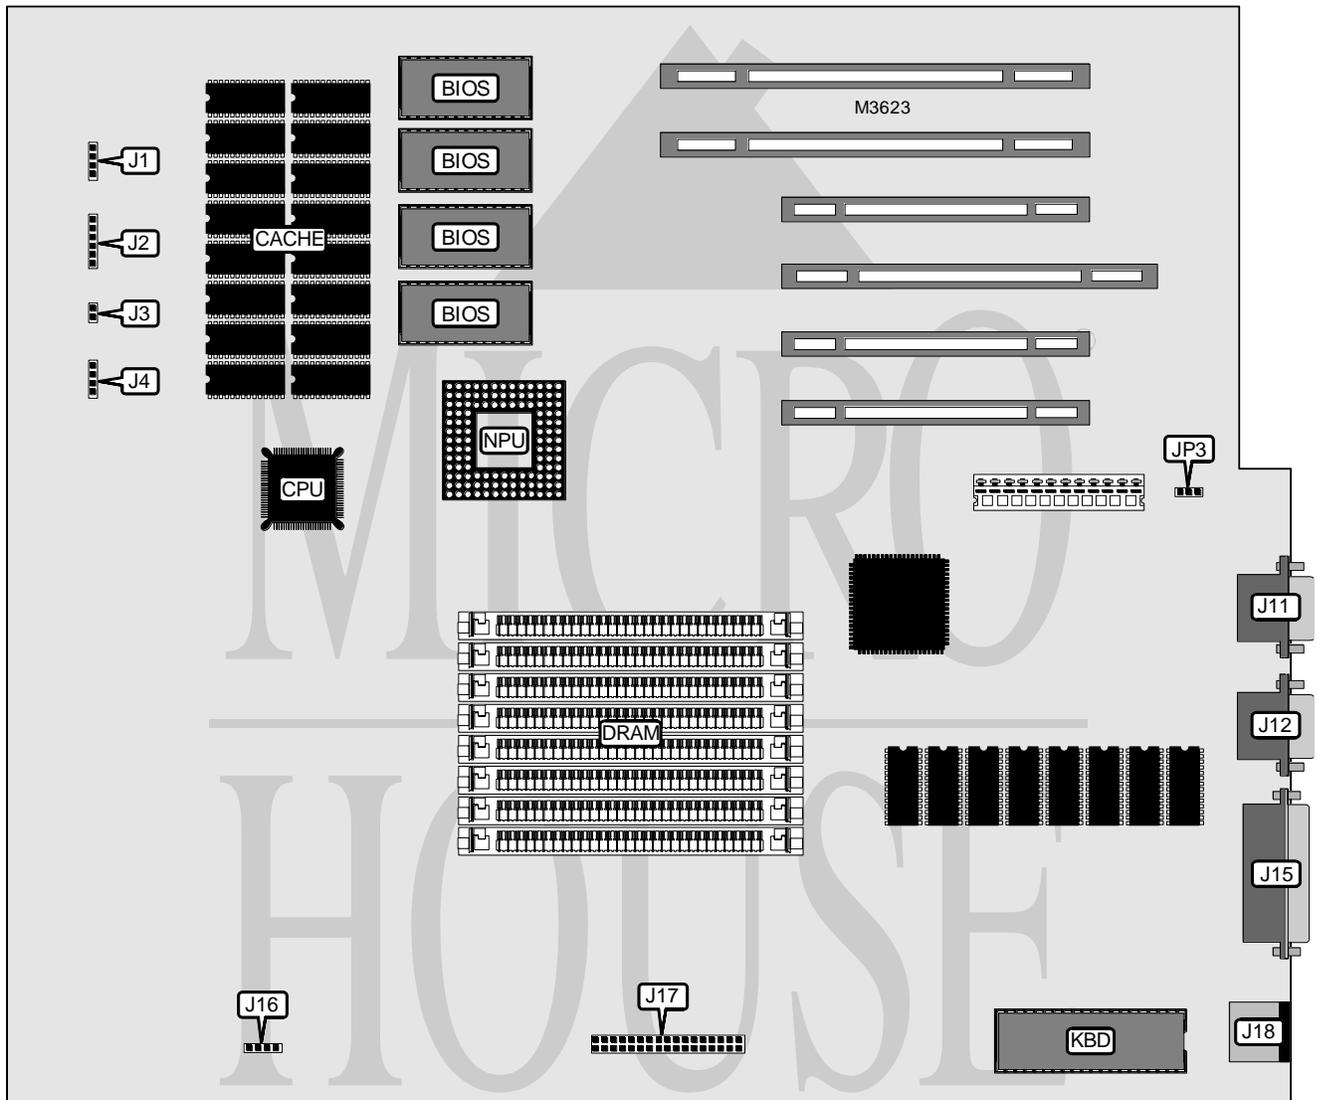

Continued on next page . . .

# MEMOREX TELEX CORPORATION

## 7270

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Serial port	J12
Reset switch/LEDs	J2	Parallel port	J15
Power LED & keylock	J3	Keyboard connector	J16
External battery	J4	Floppy drive interface	J17
VGA port	J11	PS/2 mouse port	J18

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP3	Unidentified

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(2) 1M x 9			

VIDEO MEMORY CONFIGURATION
Note: The size of the video memory is unidentified.