


UNIDENTIFIED SPC-386SX (P9) (VER. 2.0)

Processor	80386SX
Processor Speed	16MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI/Award/Phoenix
Dimensions	327mm x 218mm
I/O Options	None
NPU Options	80387SX

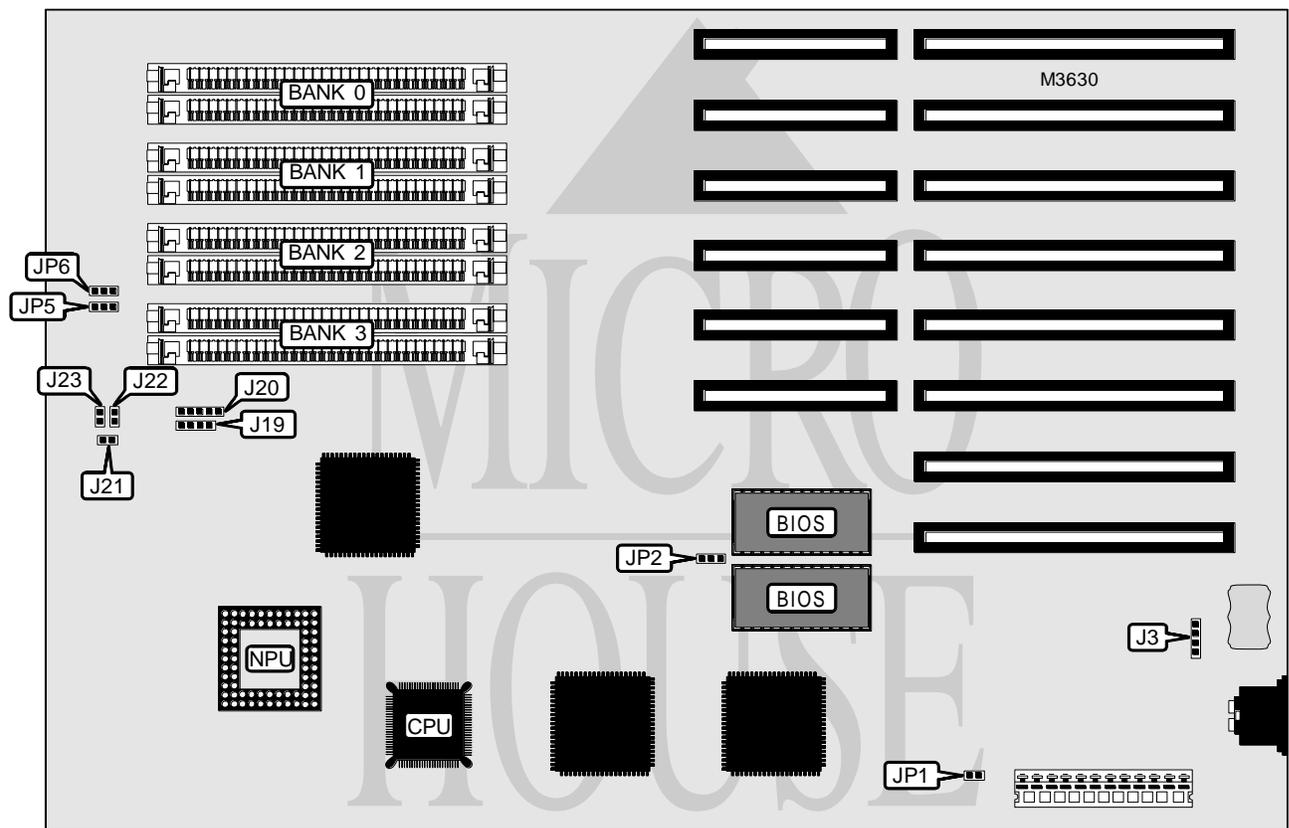

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Turbo LED	J21
Speaker	J19	Reset switch	J22
Power LED & keylock	J20	Turbo switch	J23

Continued on next page . . .

UNIDENTIFIED

SPC-386SX (P9) (VER. 2.0)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Battery type select internal	J3	Pins 1 & 2 closed
CMOS memory clear	J3	Pins 3 & 4 closed
Monitor type select color/EGA/VGA	JP1	Closed
Monitor type select monochrome	JP1	Open
í BIOS type select 27256	JP2	Pins 2 & 3 closed
BIOS type select 27512	JP2	Pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9			

DRAM JUMPER CONFIGURATION		
Setting	JP5	JP6
F1 mode (1 page active at any one time)	Pins 1 & 2 closed	Pins 2 & 3 closed
íF4 mode (4 pages to be active at the same time)	Pins 2 & 3 closed	Pins 2 & 3 closed
W01 mode (100ns DRAM)	Pins 2 & 3 closed	Pins 1 & 2 closed
W02 mode (120ns DRAM)	Pins 1 & 2 closed	Pins 1 & 2 closed