


UNIDENTIFIED M710B

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	254mm x 218mm
I/O Options	None
NPU Options	80387SX

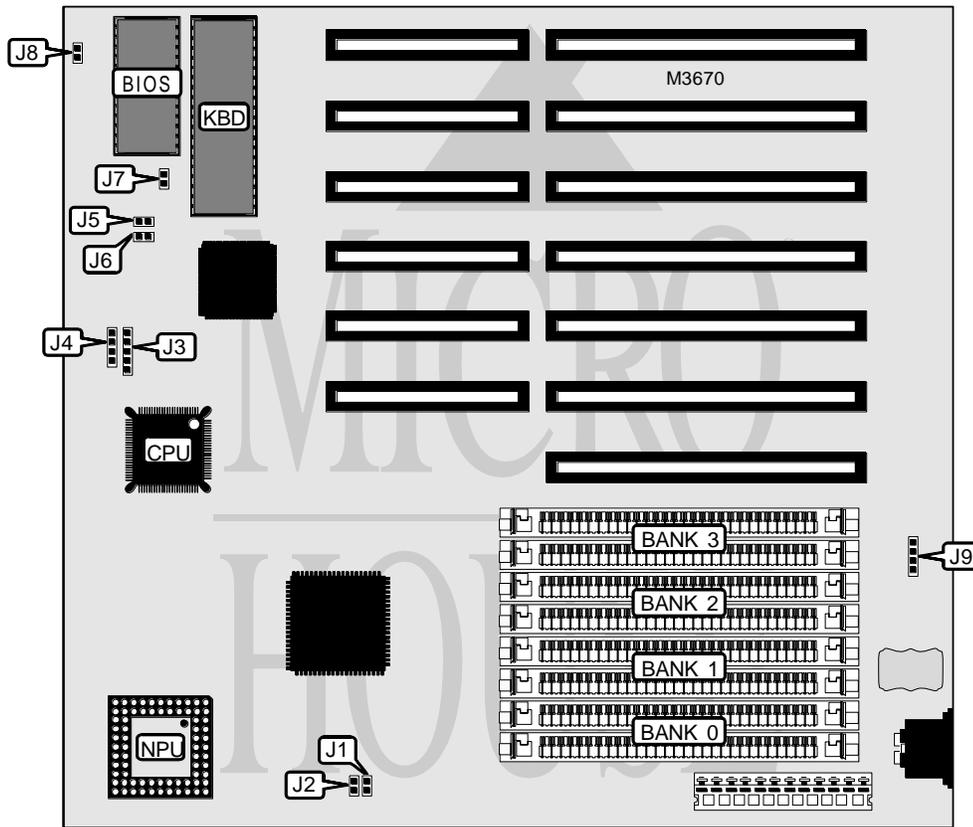

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J3	Reset switch	J6
Speaker	J4	Turbo switch	J8
Turbo LED	J5	External battery	J9

Continued on next page. . .

UNIDENTIFIED M710B

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select color	J7	Closed
Monitor type select monochrome	J7	Open
Turbo enabled through software (CTRL, ALT +)	J8	Open
Turbo disabled through software (CTRL, ATL -)	J8	Open
Turbo disabled	J8	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9			

DRAM PARITY CONFIGURATION		
Setting	J1	J2
Enabled	Open	Open
Disabled	Closed	Closed