


# BEK-TRONIC TECHNOLOGY, INC.

## BEK-3606E

<b>Processor</b>	80386DX
<b>Processor Speed</b>	25/33/40MHz
<b>Chip Set</b>	OPTI
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

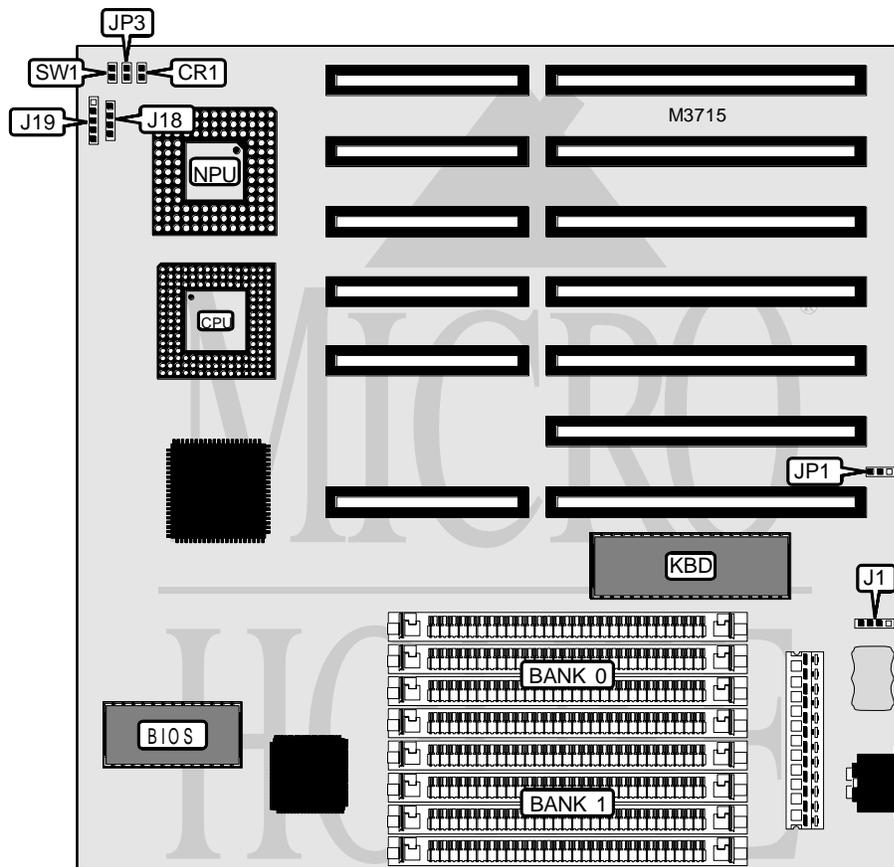

  
 LOCATION UNIDENTIFIED

*Continued on next page . . .*

**BEK-TRONIC TECHNOLOGY, INC.**  
**B E K - 3 6 0 6 E**

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR1	Speaker	J18
External battery	J1	Power LED & keylock	J19
Turbo switch	JP3	Reset switch	SW1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP1	Pins 2 & 3 closed
CMOS memory clear	JP1	Pins 1 & 2 closed
Monitor type select color	JP2	Pins 2 & 3 closed
Monitor type select monochrome	JP2	Pins 1 & 2 closed
Turbo enabled	JP3	Open
Turbo disabled	JP3	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
32MB	(4) 4M x 9	(4) 4M x 9