UNIDENTIFIED
P H O E N I X - P C I I

Processor	8088
Processor Speed	4.77/8MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Phoenix
Dimensions	304mm x 216mm
I/O Options	Game interface
NPU Options	8087

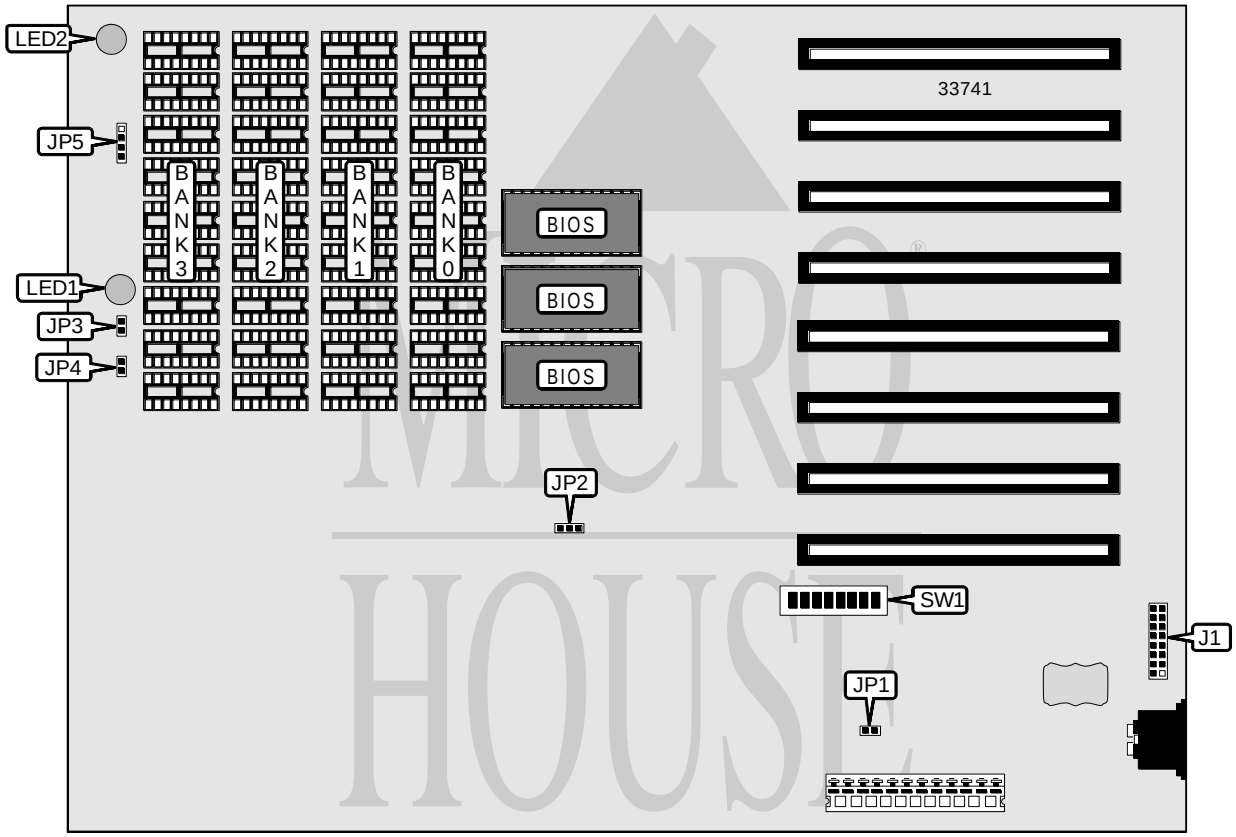

CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
Game interface	J1	Speaker	JP5
Turbo switch	JP2	Power LED	LED1
Reset switch	JP3	Turbo LED	LED2
Keylock	JP4		

Continued on next page. . .

Copyright © 1995, 1996, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.

UNIDENTIFIED
P H O E N I X - P C I I

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	**Label**	**Position**
Clock function at HX240 enabled	JP1	Closed
Clock function at HX240 disabled	JP1	Open
Turbo enabled	JP2	Pins 1 & 2 closed
Turbo disabled	JP2	Pins 2 & 3 closed
í Factory configured - do not alter	SW1/1	Off
NPU not installed	SW1/2	On
NPU installed	SW1/2	Off

DRAM CONFIGURATION				
Size	**Bank 0**	**Bank 1**	**Bank 2**	**Bank 3**
128KB	(9) 4164	(9) 4164	None	None
256KB	(9) 41256	None	None	None
512KB	(9) 41256	(9) 41256	None	None
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164
1MB	(9) 41256	(9) 41256	(9) 41256	(9) 41256

DRAM JUMPER CONFIGURATION		
Size	**SW1/3**	**SW1/4**
128KB	Off	On
192KB	On	Off
256KB (or more)	Off	Off

FLOPPY DRIVE SELECTION		
Drives installed	**SW1/7**	**SW1/8**
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR SELECTION		
Type	**SW1/5**	**SW1/6**
None	On	On
Color (40 x 20)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off

Copyright © 1995, 1996, **Micro House International** (303) 443-3388. All rights reserved. Including the right of reproduction in any form.