


# DIGITAL EQUIPMENT CORPORATION DECPC 400MT

<b>Processor</b>	80486DX/80486DX2
<b>Processor Speed</b>	33/50(internal)/66(internal)MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Unidentified
<b>Maximum Onboard Memory</b>	64MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	CPU slot, parallel port, PS/2 mouse port, serial ports (2), VGA port
<b>NPU Options</b>	None

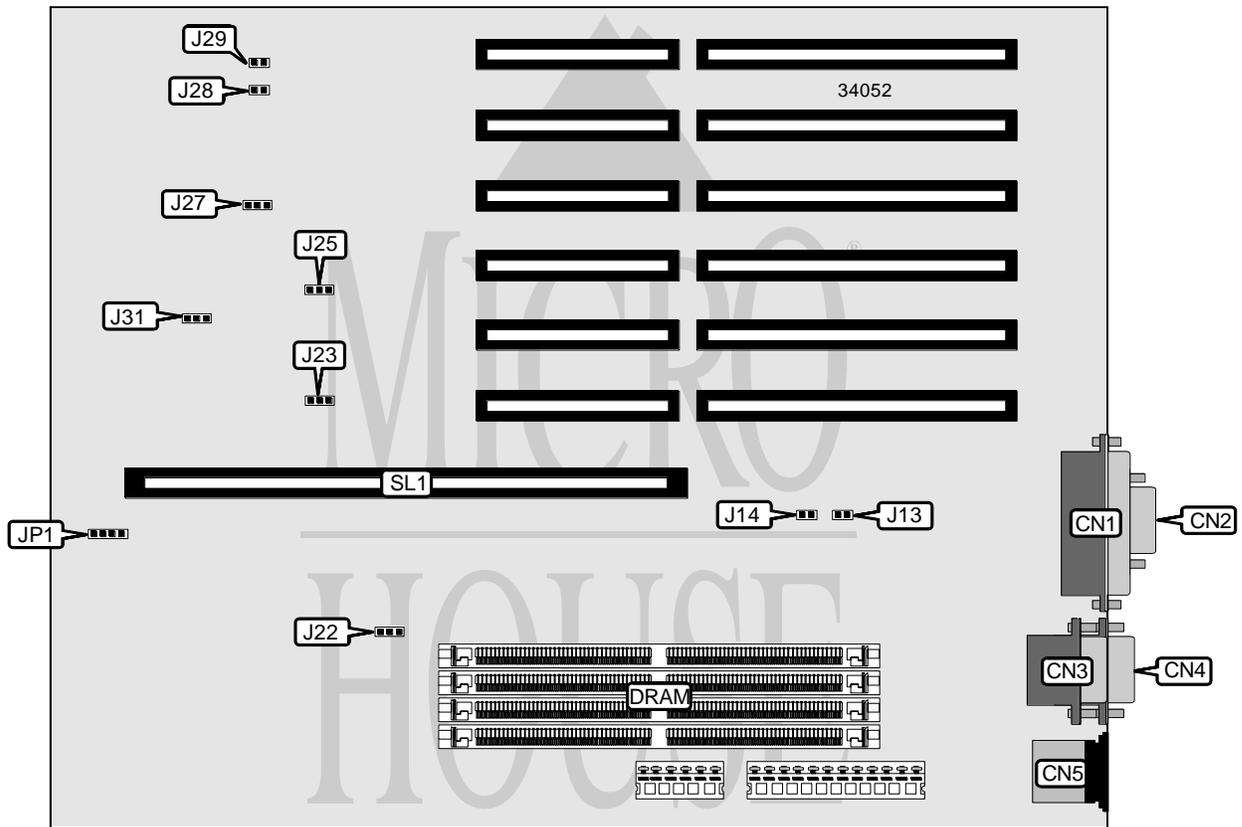

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	PS/2 mouse port	CN5
VGA port	CN2	External battery	JP1
Serial port 2	CN3	CPU slot	SL1
Serial port 1	CN4		

Continued on next page. . .

# DIGITAL EQUIPMENT CORPORATION

## DECPC 400MT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í VGA IRQ9 disabled	J13	Open
VGA IRQ9 enabled	J13	Closed
í On board video enabled	J14	Closed
On board video disabled	J14	Open
í Local enabled	J23	Pins 1 & 2 closed
Local & ISA enabled	J23	Pins 2 & 3 closed
í Parallel port unidirectional	J25	Pins 1 & 2 closed
Parallel port bidirectional	J25	Pins 2 & 3 closed
í Reset switch enabled	J27	Pins 1 & 2 closed
Reset switch disabled	J27	Pins 2 & 3 closed
í Factory configured - do not alter	J28	Unidentified
Monitor type select color	J29	Closed
Monitor type select monochrome	J29	Open
í CMOS memory normal operation	J31	Pins 1 & 2 closed
CMOS memory clear	J31	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 1M x 36	None	None	None
8MB	(1) 1M x 36	(1) 1M x 36	None	None
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	None
16MB	(1) 1M x 36			
16MB	(1) 4M x 36	None	None	None
20MB	(1) 1M x 36	(1) 4M x 36	None	None
24MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	None
32MB	(1) 4M x 36	(1) 4M x 36	None	None
40MB	(1) 1M x 36	(1) 1M x 36	(1) 4M x 36	(1) 4M x 36
48MB	(1) 4M x 36	(1) 4M x 36	(1) 4M x 36	None
64MB	(1) 4M x 36			

Note: The location of banks 0, 1, 2 & 3 are unidentified.

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
512KB	512KB	None
1MB	512KB	512KB

Note: The location of banks 0 & 1 are unidentified.

VIDEO MEMORY JUMPER CONFIGURATION	
Size	J22
512KB	Pins 1 & 2 closed
1MB	Pins 2 & 3 closed