


COMPAQ COMPUTER CORPORATION  
 PROFESSIONAL WORKSTATION 6000 MODEL 6266,  
 MODEL 6300

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium II
<b>Processor Speed</b>	266/300MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	512MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	512KB (located on Pentium II CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	220mm x 220mm
<b>I/O Options</b>	CPU expansion slot, memory expansion slot
<b>NPU Options</b>	None

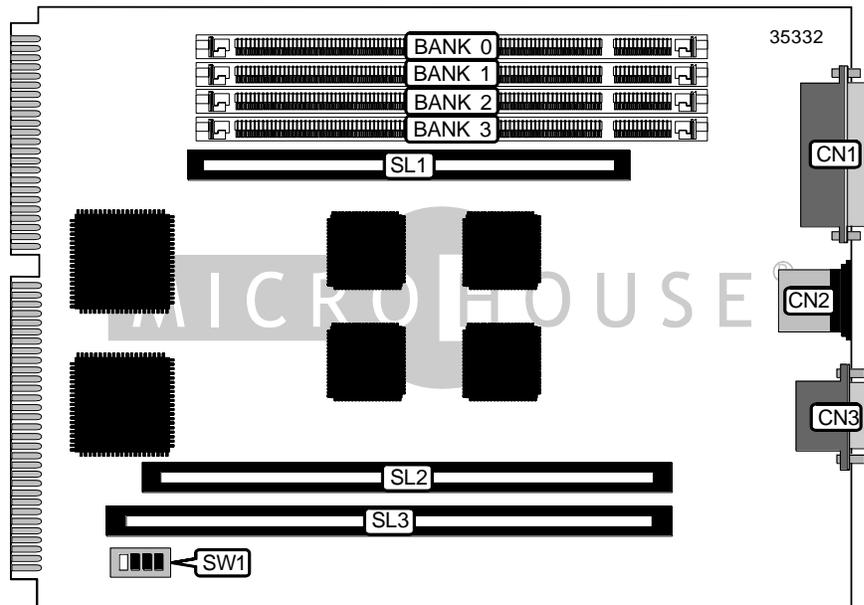

CONNECTIONS			
Purpose	Location	Purpose	Location
Port	CN1	Expansion slot	SL1
Port	CN2	Expansion slot	SL1
Port	CN3	Expansion slot	SL3
Note: Ports are shown for location purposes only. The type is unidentified.			

Continued on next page. . .

COMPAQ COMPUTER CORPORATION  
 PROFESSIONAL WORKSTATION 6000 MODEL 6266,  
 MODEL 6300

... continued from previous page

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(1) 4M x 64	None	None	None
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64			
160MB	(1) 16M x 64	(1) 4M x 64	None	None
192MB	(1) 16M x 64	(1) 8M x 64	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 8M x 64			
512MB	(1) 16M x 64			

CACHE CONFIGURATION
Note: 512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION						
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4
266MHz	66MHz	4x	Off	On	On	Off
300MHz	66MHz	4.5x	Off	On	On	Off