


# HEWLETT-PACKARD COMPANY HP VECTRA VE 5/XXX

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium
<b>Processor Speed</b>	75/90MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Cirrus Logic
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	256KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port, video memory slot
<b>NPU Options</b>	None

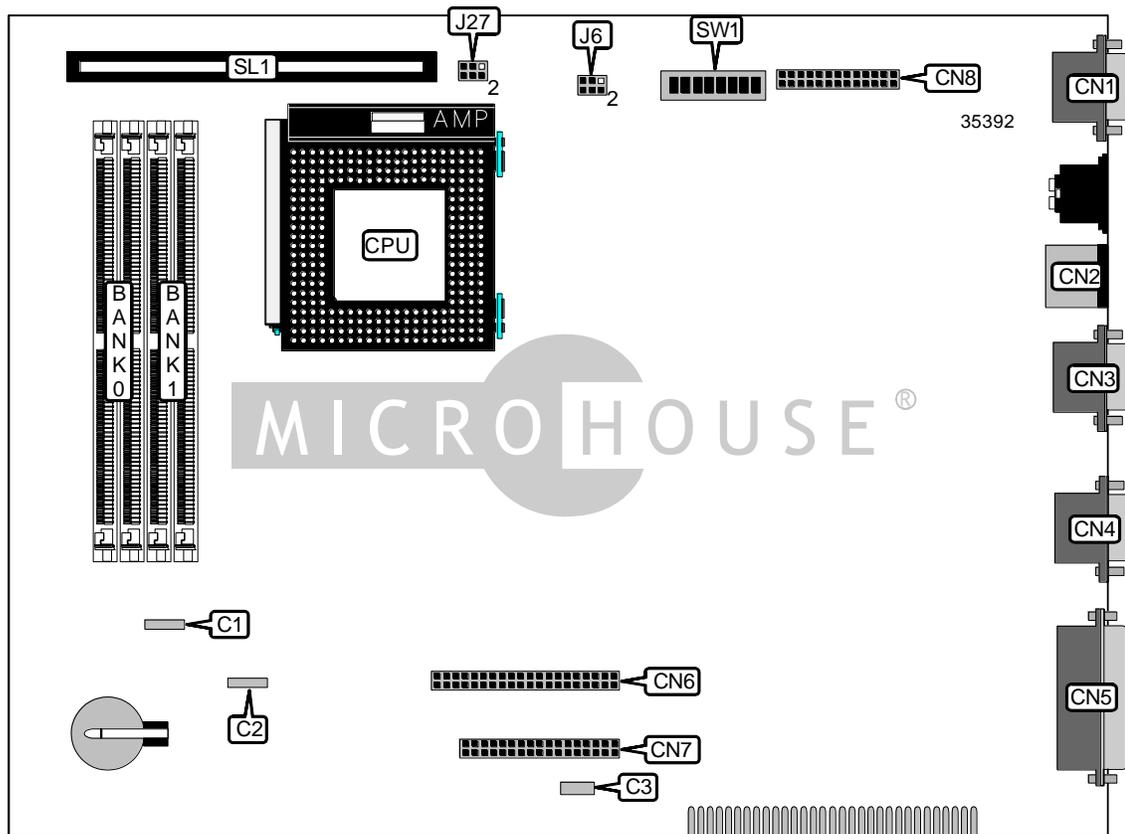

*Continued on next page. . .*

HEWLETT-PACKARD COMPANY  
 HP VECTRA VE 5/XXX

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	C1	Serial port 1	CN4
Speaker	C2	Parallel port	CN5
SCSI interface LED	C3	IDE interface	CN6
VGA port	CN1	Floppy drive interface	CN7
PS/2 mouse port	CN2	VGA feature connector	CN8
Serial port 2	CN3	Video memory slot	SL1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Flash BIOS update enabled	SW1/1	Off	
Flash BIOS update disabled	SW1/1	On	
í Factory configured - do not alter	SW1/2	Off	
í CMOS memory normal operation	SW1/3	Off	
CMOS memory clear	SW1/3	On	
í Password enabled	SW1/4	Off	
Password disabled	SW1/4	On	
í Memory parity disabled	SW1/5	Off	
Memory parity enabled	SW1/5	On	
í Factory configured - do not alter	SW1/7	Off	
í Factory configured - do not alter	SW1/8	Off	

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	
8MB	(2) 1M x 36	None	
16MB	(2) 2M x 36	None	
16MB	(2) 1M x 36	(2) 1M x 36	
24MB	(2) 2M x 36	(2) 1M x 36	
32MB	(2) 4M x 36	None	
32MB	(2) 2M x 36	(2) 2M x 36	
40MB	(2) 4M x 36	(2) 1M x 36	
48MB	(2) 4M x 36	(2) 2M x 36	
64MB	(2) 8M x 36	None	
64MB	(2) 4M x 36	(2) 4M x 36	
72MB	(2) 8M x 36	(2) 1M x 36	
80MB	(2) 8M x 36	(2) 2M x 36	
96MB	(2) 8M x 36	(2) 4M x 36	
128MB	(2) 8M x 36	(2) 8M x 36	

Continued on next page...

HEWLETT-PACKARD COMPANY  
 HP VECTRA VE 5/XXX

... continued from previous page

CACHE CONFIGURATION	
Size	SL1
OKB	Not installed
256KB	256KB module installed

VIDEO MEMORY CONFIGURATION
Note: 1MB video memory is factory installed and is not configurable. The location is unidentified.

CPU SPEED SELECTION				
CPU speed	Clock speed	Multiplier	J6	SW1/6
75MHz	50MHz	1.5x	Pins 5 & 6 closed	Off
90MHz	60MHz	1.5x	Pins 3 & 4 closed	Off

CPU VOLTAGE SELECTION	
Voltage	J27
VCC	Pins 1 & 2 closed
VR	Pins 3 & 4 closed
VRE	Pins 5 & 6 closed