


NB77-BC rev. A+

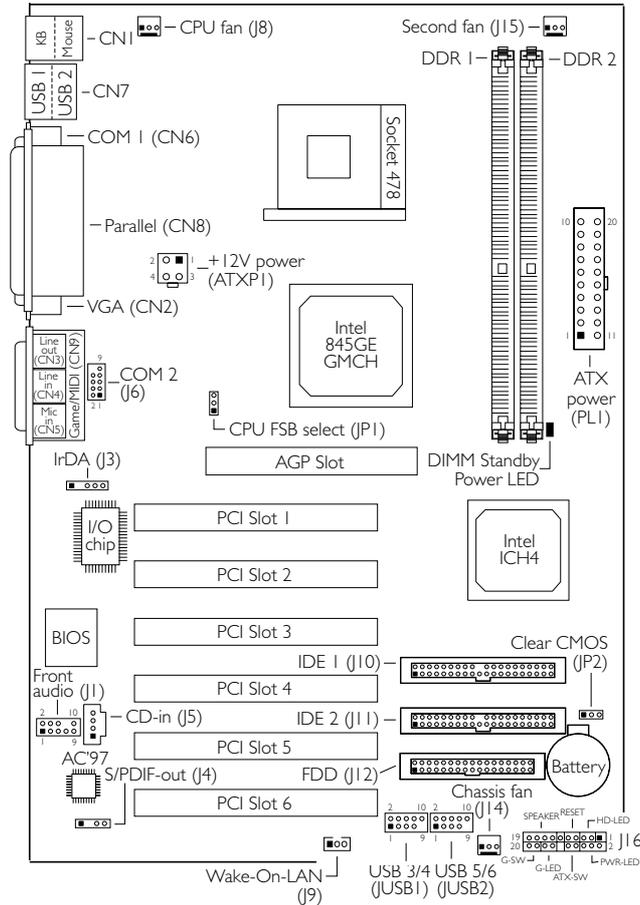

CPU FSB Select (JP1) 1-2 On: Auto (default); 2-3 On: 100MHz; All Off: 133MHz

Clear CMOS Data (JP2) 1-2 On: Normal (default); 2-3 On: Clear CMOS Data

The DIMM Standby Power LED will turn red when the system's power is on or when it is in the Suspend state (Power On Suspend or Suspend to RAM). It will not light when the system is in the Soft-Off state. Lighted LED serves as a reminder that you must power-off the system then turn off the power supply's switch or unplug the power cord prior to installing any memory modules.

For the Wake-On-KB and/or Wake-On-LAN function, the 5VSB power source of your power supply must support $\geq 720\text{mA}$.

For the Suspend to RAM function, the 5VSB power source of your power supply must support $\geq 1\text{A}$.

For the Wake-On-USB KB function for 2 USB ports, the 5VSB power source of your power supply must support $\geq 1.5\text{A}$.

For the Wake-On-USB KB function for 3 or more USB ports, the 5VSB power source of your power supply must support $\geq 2\text{A}$.

934-NB7701-000
64001230