


ABIT COMPUTER CORPORATION

AH6

Configuration

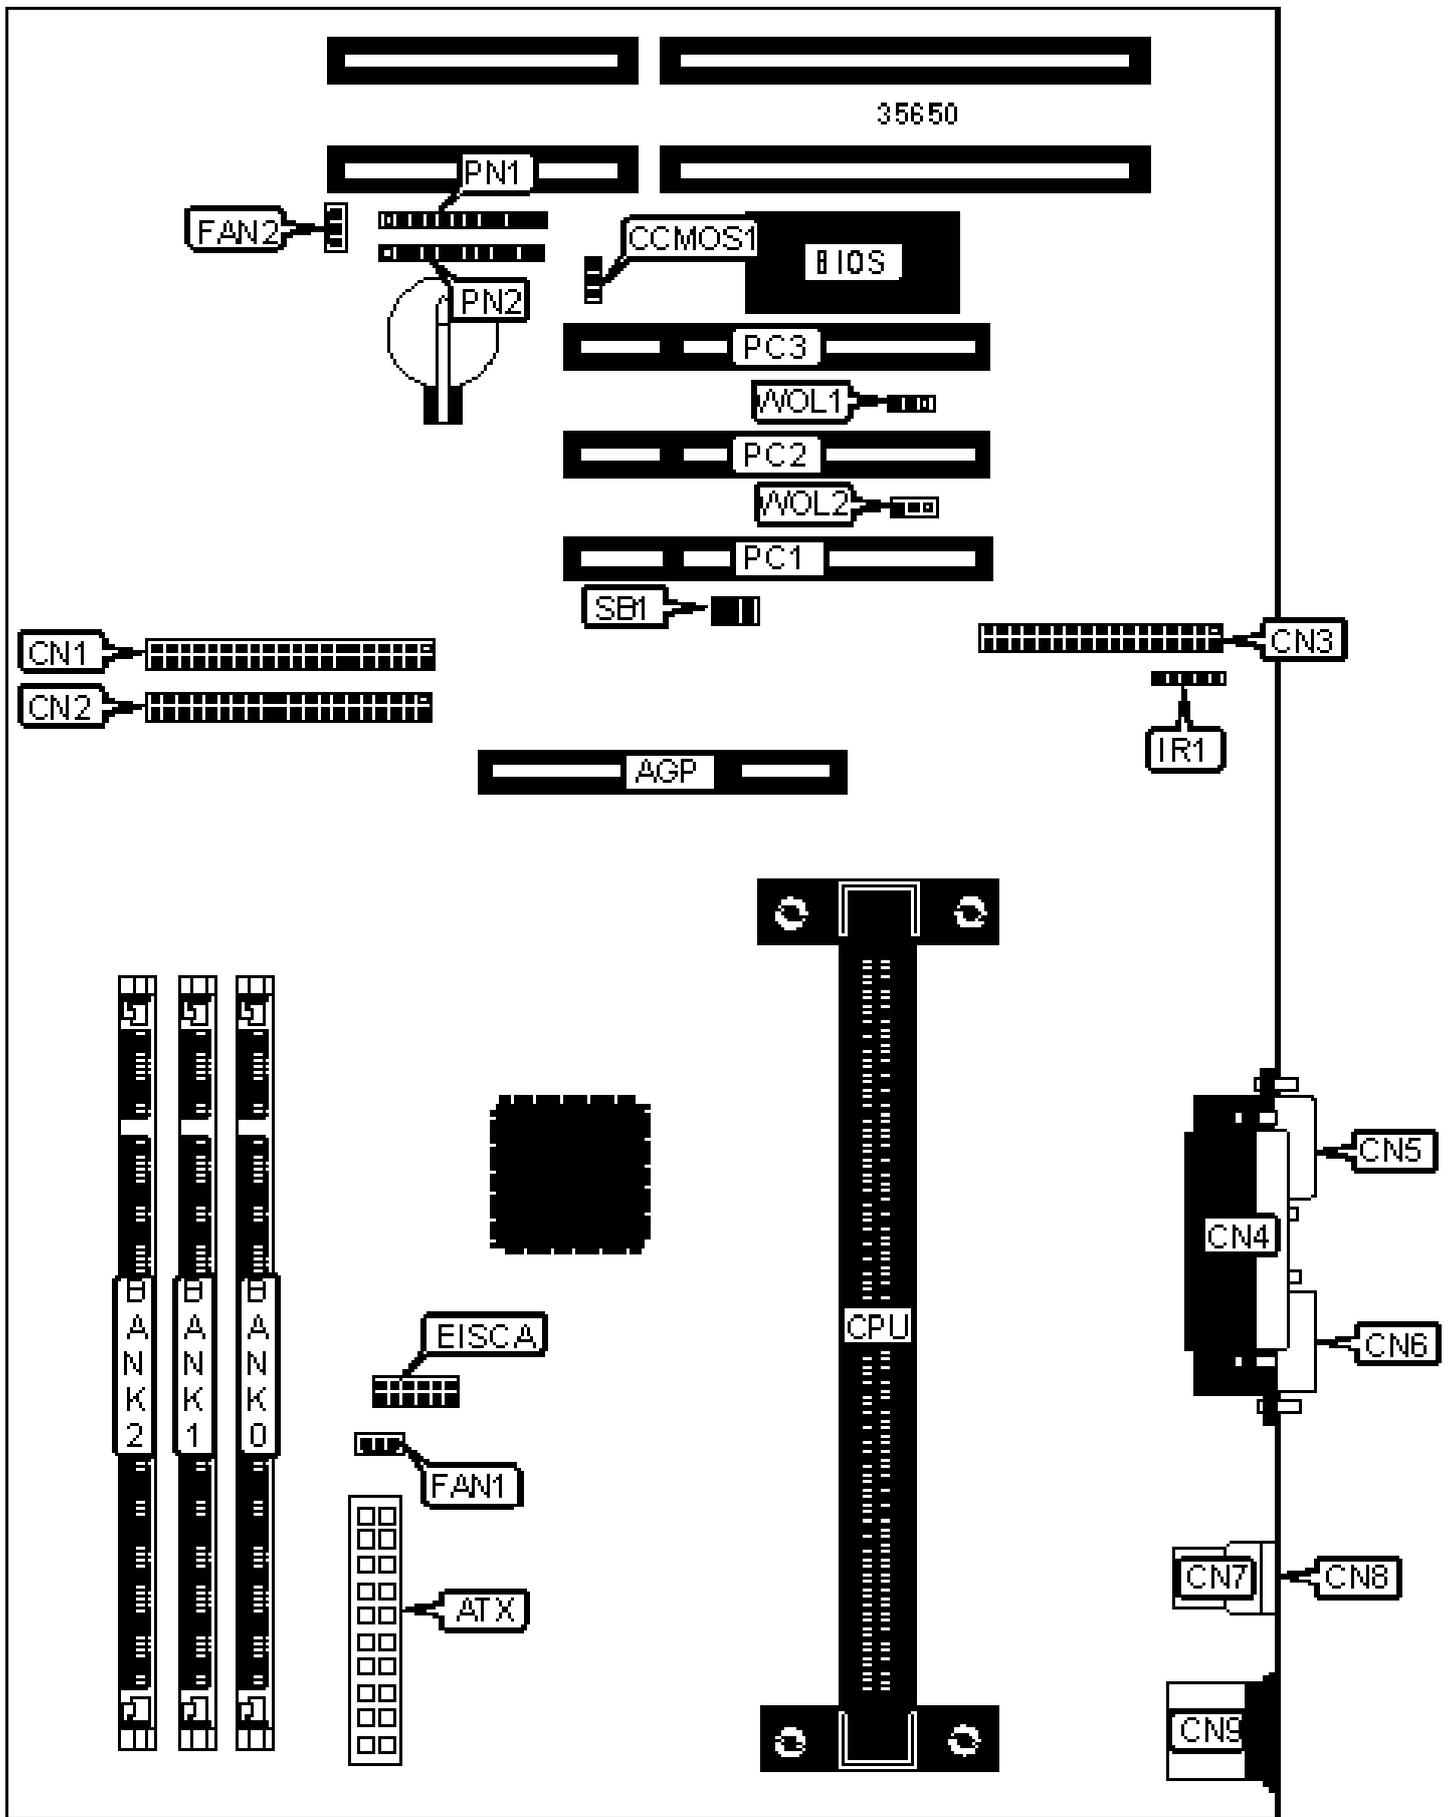

CONNECTIONS

| Purpose | Location | Purpose | Location |
|------------------------|----------|------------------------|-----------------|
| AGP slot | AGP | Chassis fan power | FAN2 |
| ATX power connector | ATX | IR connector | IR1 |
| IDE interface 1 | CN1 | Reset switch | JP1/pins 1 & 2 |
| IDE interface 2 | CN2 | Speaker | JP1/pins 4 - 7 |
| Floppy drive interface | CN3 | Green PC LED | JP1/pins 9 & 10 |
| Parallel port | CN4 | Power LED & keylock | JP2/pins 1 - 5 |
| Serial port 2 | CN5 | IDE interface LED | JP2/pins 6 & 7 |
| Serial port 1 | CN6 | Soft off power supply | JP2/pins 8 & 9 |
| USB connector 1 | CN7 | 32-bit PCI slots | PC1 - PC5 |
| USB connector 2 | CN8 | SB link header | SB1 |
| PS/2 mouse port | CN9 | Wake on LAN connectors | WOL1 |
| CPU fan power | FAN1 | Wake on LAN connectors | WOL2 |

USER CONFIGURABLE SETTINGS

| Function | Label | Position |
|--------------------------------|--------|-------------------|
| » CMOS memory normal operation | CCMOS1 | Pins 1 & 2 closed |
| CMOS memory clear | CCMOS1 | Pins 2 & 3 closed |

DIMM CONFIGURATION

| Size | Bank 0 | Bank 1 | Bank 2 |
|------|-------------|-------------|--------|
| 8MB | (1) 1M x 64 | None | None |
| 16MB | (1) 2M x 64 | None | None |
| 16MB | (1) 1M x 64 | (1) 1M x 64 | None |
| 24MB | (1) 2M x 64 | (1) 1M x 64 | None |

| | | | |
|------|-------------|-------------|-------------|
| 24MB | (1) 1M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 32MB | (1) 4M x 64 | None | None |
| 32MB | (1) 2M x 64 | (1) 2M x 64 | None |
| 32MB | (1) 2M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 40MB | (1) 4M x 64 | (1) 1M x 64 | None |
| 48MB | (1) 4M x 64 | (1) 2M x 64 | None |
| 48MB | (1) 2M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 48MB | (1) 4M x 64 | (1) 1M x 64 | (1) 1M x 64 |

DIMM CONFIGURATION (CONT')

| Size | Bank 0 | Bank 1 | Bank 2 |
|-------|--------------|-------------|-------------|
| 64MB | (1) 8M x 64 | None | None |
| 64MB | (1) 4M x 64 | (1) 4M x 64 | None |
| 64MB | (1) 4M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 72MB | (1) 8M x 64 | (1) 1M x 64 | None |
| 80MB | (1) 8M x 64 | (1) 2M x 64 | None |
| 80MB | (1) 8M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 96MB | (1) 8M x 64 | (1) 4M x 64 | None |
| 96MB | (1) 4M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 96MB | (1) 8M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 128MB | (1) 16M x 64 | None | None |
| 128MB | (1) 8M x 64 | (1) 8M x 64 | None |
| 128MB | (1) 8M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 136MB | (1) 16M x 64 | (1) 1M x 64 | None |
| 144MB | (1) 16M x 64 | (1) 2M x 64 | None |
| 144MB | (1) 16M x 64 | (1) 1M x 64 | (1) 1M x 64 |

| | | | |
|-------|--------------|--------------|--------------|
| 160MB | (1) 16M x 64 | (1) 4M x 64 | None |
| 160MB | (1) 16M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 192MB | (1) 16M x 64 | (1) 8M x 64 | None |
| 192MB | (1) 8M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 192MB | (1) 16M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 256MB | (1) 16M x 64 | (1) 16M x 64 | None |
| 256MB | (1) 16M x 64 | (1) 8M x 64 | (1) 8M x 64 |
| 256MB | (1) 32M x 64 | None | None |
| 264MB | (1) 32M x 64 | (1) 1M x 64 | (1) 1M x 64 |
| 272MB | (1) 32M x 64 | (1) 2M x 64 | None |
| 272MB | (1) 32M x 64 | (1) 1M x 64 | None |
| 288MB | (1) 32M x 64 | (1) 4M x 64 | None |
| 288MB | (1) 32M x 64 | (1) 2M x 64 | (1) 2M x 64 |
| 320MB | (1) 32M x 64 | (1) 8M x 64 | None |
| 320MB | (1) 32M x 64 | (1) 4M x 64 | (1) 4M x 64 |
| 384MB | (1) 16M x 64 | (1) 16M x 64 | (1) 16M x 64 |
| 384MB | (1) 32M x 64 | (1) 8M x 64 | (1) 8M x 64 |