


# Packard Bell 386SX M/Board

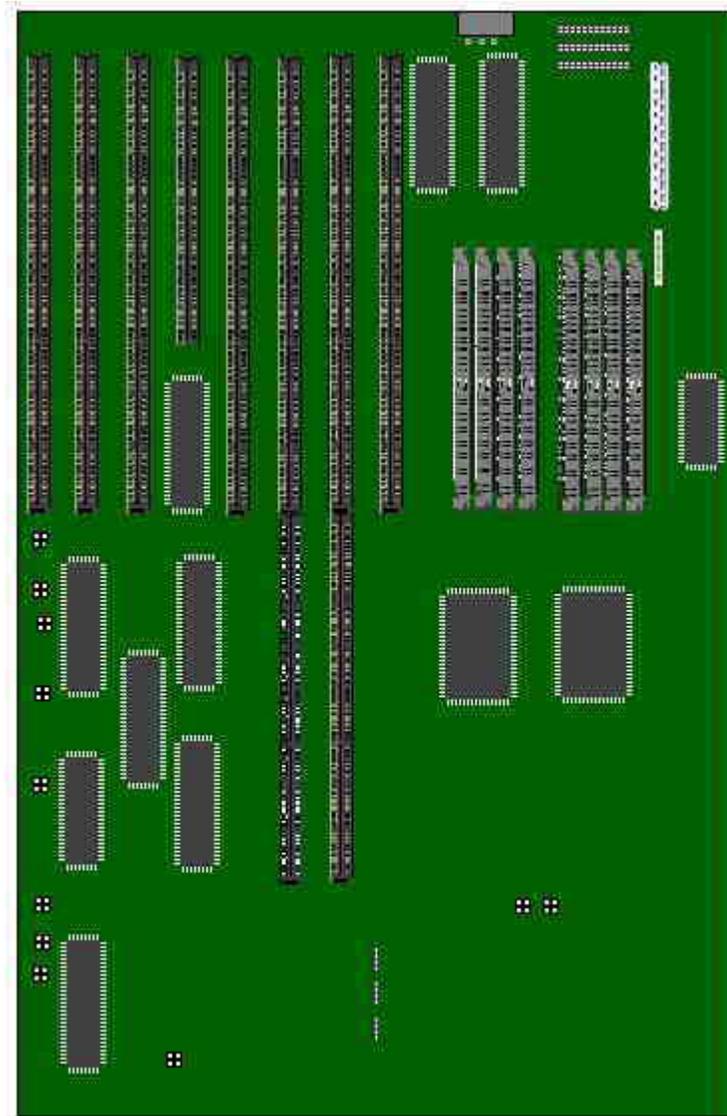

## Specification

- **Battery** : DS1287
- **BIOS** : 2 X 32K Phoenix BIOS Phoenix 1.10.01. To access setup, Ctrl-Alt-Esc
- **Bus Architecture** : ISA based system bus
- **Cache** : N/A
- **CPU** : 80386SX-16 MHz. Keyboard Switchable (Ctrl)-(Alt)-(-) = 8 MHz, (Ctrl)-(Alt)-(+) = 16 MHz.
- **Interfaces** :
  - 1 DB-25 Parallel Port
  - 2 DB-9 Serial ports
  - 1 PS/2 Keyboard port
  - 1 PS/2 Mouse port
  - 1 VGA port
- **RAM** : 1MB standard Maximum on Motherboard 4 MB
- **Speaker** : Piezoelectric, soldered on motherboard

- **Video** : Paradise built into motherboard
- **Video RAM** : 256k

## Jumpers

Function	Jumper	Description
Monitor Type (W3)	1-2 2-3	Monochrome Colour
Floppy Controller (W4)	1-2 2-3	Disabled Enabled
Onboard VGA (W11)	1-2 2-3	Disabled Enabled
IDE Access LED (W12)	1-2 2-3	Disabled Enabled
PS/2 Mouse Port (W16)	OPEN CLOSED	Disabled Enabled