


SUN02-B

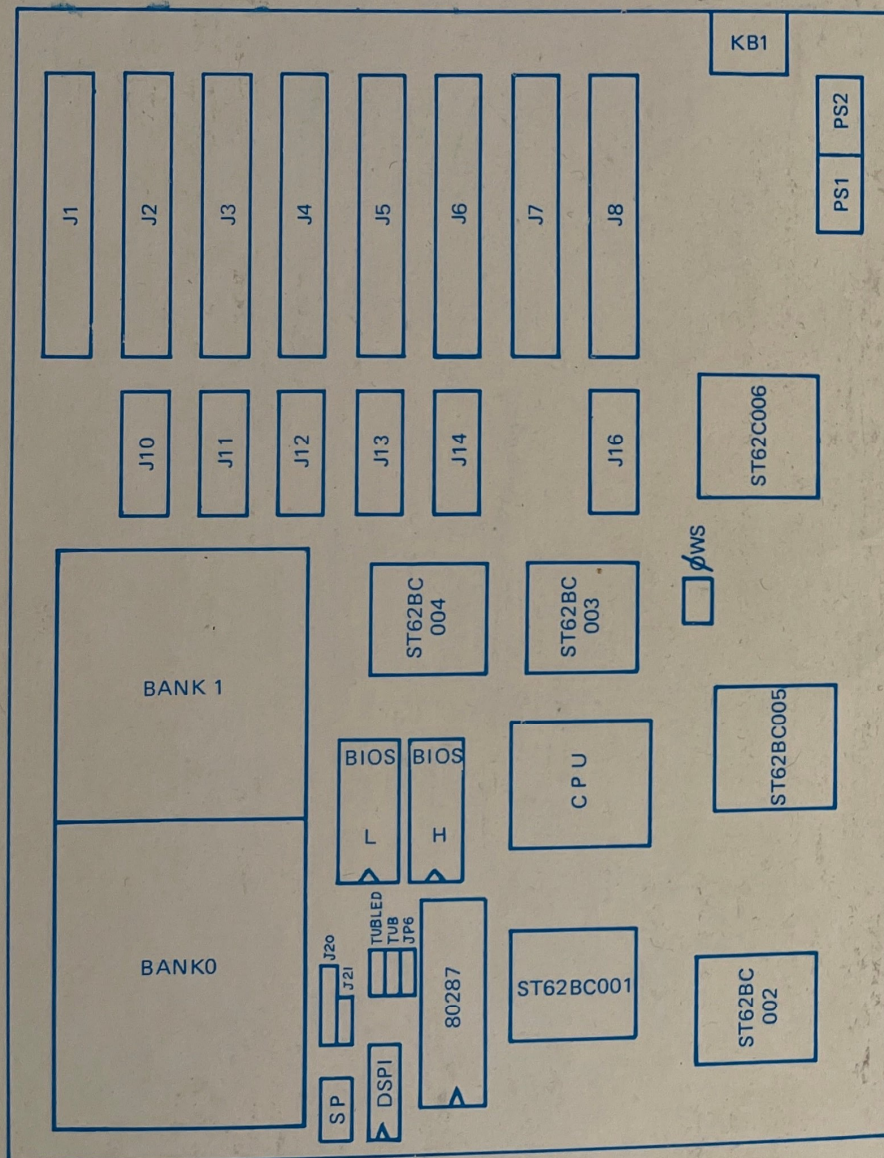

JUMPER SETTING

ON ☐ 2 : for monochrome
 OFF ☐ 2 : for color

DSP 1 #2 ON ☐ 2 : for color
 OFF ☐ 2 : for color

DSP 1 : # 6 ~ 8 : RAM SIZE

#6	#7	#8	MODE	SIZE
ON	ON	ON	0	512KB
ON	ON	OFF	1	640KB
ON	OFF	ON	2	640KB + 384 KB
ON	OFF	OFF	3	640KB + EMS (384KB)
OFF	ON	ON	4	640KB + 1408KB
OFF	ON	OFF	5	640KB + EMS (1,408KB)
OFF	OFF	ON	6	640KB + 3456KB
OFF	OFF	OFF	7	640KB + EMS (3456KB)

JP21 ☐ 1 ☐ 2 ☐ 3 : 80287 high clock
☐ 1 ☐ 2 ☐ 3 : 80287 low clock

TUBLED ☐ : High speed LED

TUB ☐ : Open for Low speed
☐ : Close for High speed

QWS ☐ : Open for 1 wait state
☐ : Close for 0 wait state

JP6 : Reset connector
 JP20 : Power LED and Keylock connector
 SP : Speaker connector