



## System Board Components

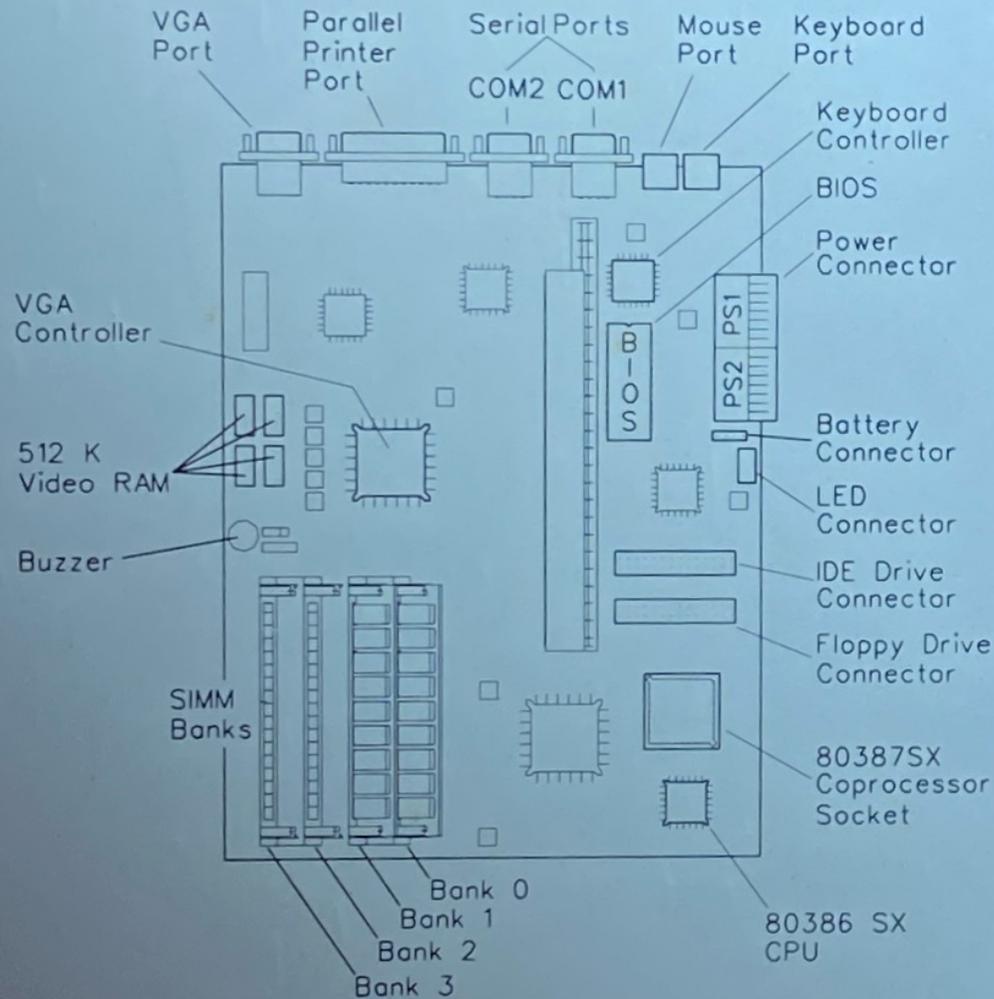

## System Board Jumpers

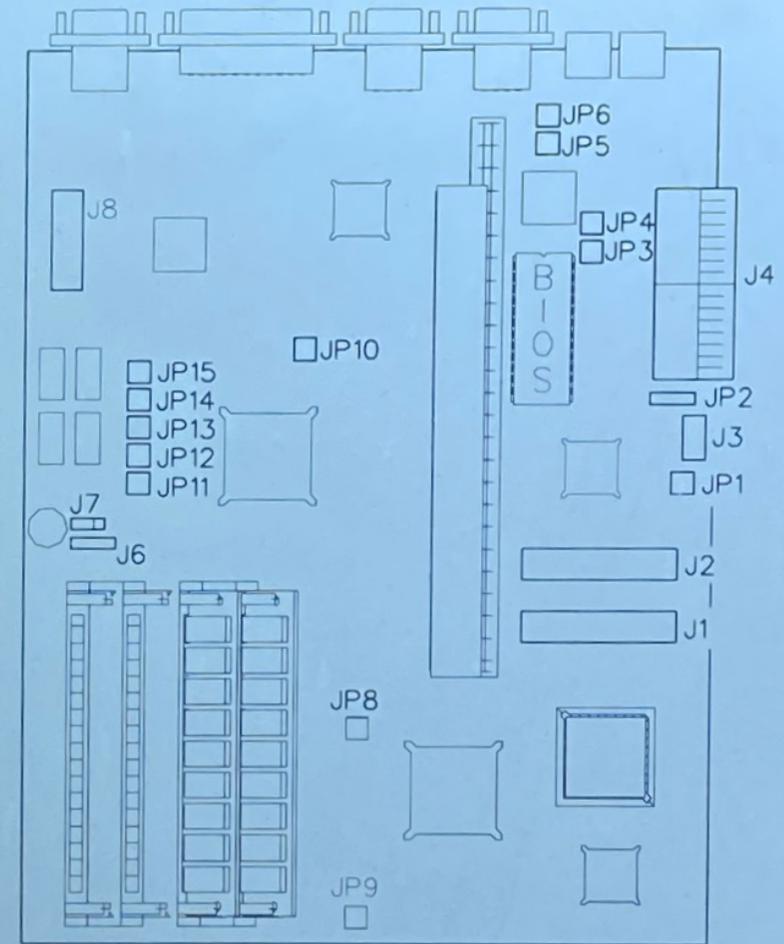

615-5223-A0

## Jumpers and Connectors

Number	Function	Default	Number	Function	Default	Number	Function	Default
J1	Diskette Drive Connector	—	JP1	CMOS RAM Clear	Off	JP8	Not Used	Off
J2	IDE Hard Drive Connector	—	JP2	Battery Connector	On	JP9	Reset Switch Connector	On
J3	LED Connector	—	JP3	Password Clear	Off	JP10	On Board VGA Enable	On
J4	Power Supply Connector	—	JP4	PS/2 Mouse Enable	On	JP11•12	800x600x2/16/256 Mode Enable	On
J6	External Speaker Connector	—	JP5	POST Test	Off	JP13	VGA Type	On
J7	On-Board Speaker Enable	Pins 1•2	JP6	Color Monitor Type	On	JP14	Multisync Monitor Timing	Off
J8	Video Feature Connector	—				JP15	1024x768x16 Mode Enable	On