


ARTISOFT, INC.

AE-1/T ETHERNET ADAPTER

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Not Available

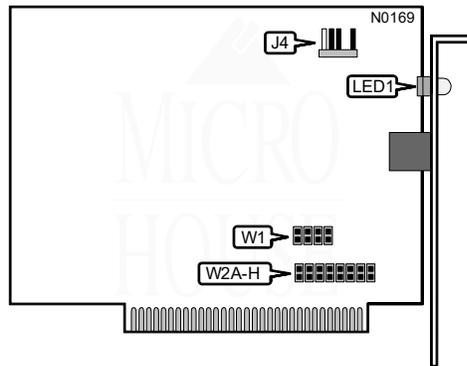

I/O BASE ADDRESS				
Address	W1A	W1B	W1C	W1D
300h	Closed	Closed	Open	Open
320h	Open	Closed	Open	Closed
340h	Closed	Open	Closed	Open
360h	Open	Open	Closed	Closed

INTERRUPT REQUEST								
IRQ	W2A	W2B	W2C	W2D	W2E	W2F	W2G	W2H
2	Closed	Open						
3	Open	Closed	Open	Open	Open	Open	Open	Open
4	Open	Open	Closed	Open	Open	Open	Open	Open
5	Open	Open	Open	Closed	Open	Open	Open	Open
6	Open	Open	Open	Open	Closed	Open	Open	Open
7	Open	Open	Open	Open	Open	Closed	Open	Open
10	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Closed						

CONNECTORS	
Purpose	Location
Peer-Hub adaptor	W4

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Twisted pair network connection is good
LED1	Green	Off	Twisted pair network connection is broken