


SYSKONNECT, INC.
SK-NET G16

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8/16-bit ISA
Topology Linear bus
 Star
Wiring Type DIX transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Available

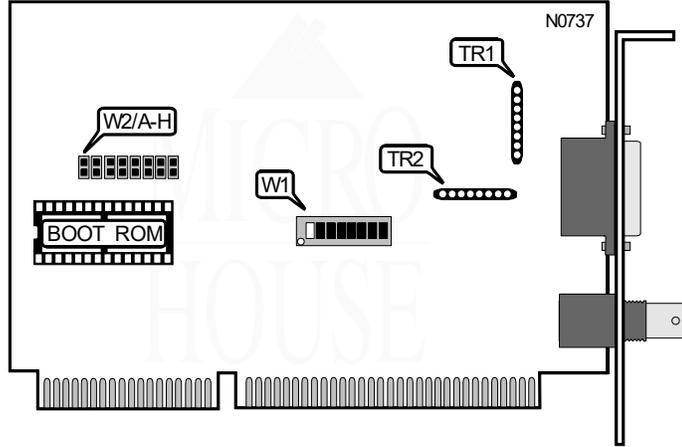

BOOT ROM	
Setting	W1/2
Disabled	On
Enabled	Off

BASE MEMORY ADDRESS				
Address	\ '1/3	\ '1/4	\ '1/5	
DC00h	Off	Off	Off	
C000h	On	On	On	
C400h	Off	On	On	
C800h	On	Off	On	
CC00h	Off	Off	On	
D000h	On	On	Off	
D400h	Off	On	Off	
D800h	On	Off	Off	

CABLE TYPE		
Type	TR1	TR2
Thick Ethernet	Installed	Not installed
Thin Ethernet	Not installed	Installed

Continued on next page . . .

SYSKONNECT, INC.
SK-NET G16

... continued from previous page

DATA BUS SIZE(VERSION A)								
Size	W2/A	W2/B	W2/C	W2/D	W2/E	W2/F	W2/G	W2/H
16-bit	Closed							
8-bit	Closed							

DATA BUS SIZE(VERSION B)								
Size	W2/A	W2/B	W2/C	W2/D	W2/E	W2/F	W2/G	W2/H
16-bit	Closed	Open						
8-bit	Open	Closed						

INTERRUPT CONFIGURATION	
IRQ3	W1/1
Enabled	On
Disabled	Off

I/O ADDRESS			
Address	\ '1/6	\ '1/7	\ '1/8
390h	Off	Off	Off
100h	On	On	On
180h	Off	On	On
208h	On	Off	On
220h	On	On	Off
288h	Off	On	Off
320h	Off	Off	On
328h	On	Off	Off