


SYSKONNECT, INC.
SK-NET G8

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear bus
 Star
Wiring Type DIX transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Available

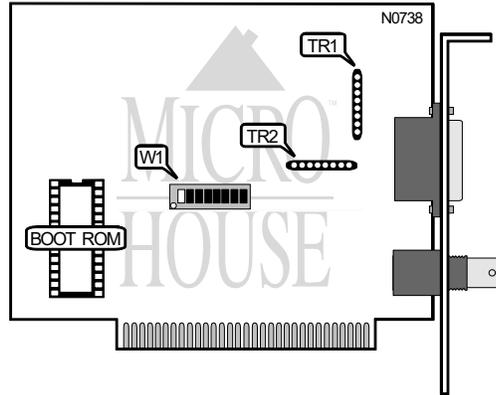

BOOT ROM	
Setting	W1/2
Disabled	On
Enabled	Off

BASE MEMORY ADDRESS			
Address	\ '1/3	\ '1/4	\ '1/5
DC00h	Off	Off	Off
C000h	On	On	On
C400h	Off	On	On
C800h	On	Off	On
CC00h	Off	Off	On
D000h	On	On	Off
D400h	Off	On	Off
D800h	On	Off	Off

CABLE TYPE		
Type	TR1	TR2
Thick Ethernet	Installed	Not installed
Thin Ethernet	Not installed	Installed

Continued on next page . . .

SYSKONNECT, INC.
SK-NET G8

... continued from previous page

INTERRUPT CONFIGURATION	
IRQ3	W1/1
Enabled	On
Disabled	Off

I/O ADDRESS			
Address	\ '1/6	\ '1/7	\ '1/8
390h	Off	Off	Off
100h	On	On	On
180h	Off	On	On
208h	On	Off	On
220h	On	On	Off
288h	Off	On	Off
320h	Off	Off	On
328h	On	Off	Off