



PIXELWORKS, INC.  
 ULTRA CLIPPER/MCA (UM1280), ULTRA CLIPPER/MCA (UM1024)

Category	Video
Video Types Supported	XVGA
Video Processor	Pixelworks, Inc.(exact location unidentified)
Highest Resolution Supported	1280 x 1024
Data Bus Type	(2) 16-bit MCA
Memory Type	DRAM
Maximum Onboard Memory	1.5MB

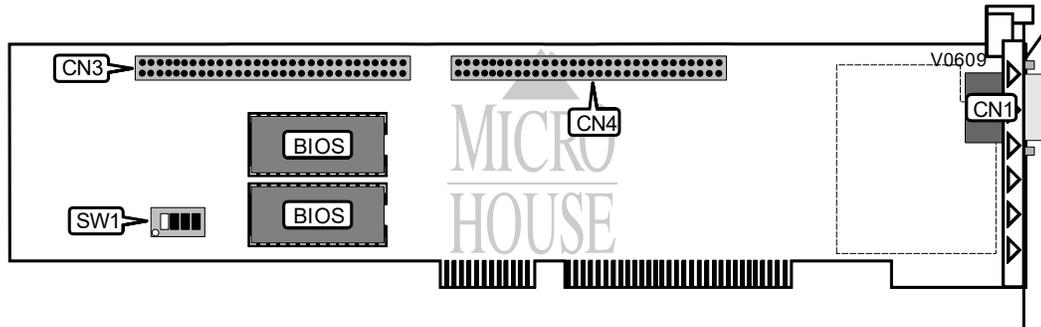

CONNECTIONS			
Pt pose	Location	Pt pose	Location
15-pin analog video port	CN1	Daughterboard connector	CN3 & CN4

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/1	On
SW1/2	Off
SW1/3	Off
SW1/4	Off



CONNECTIONS	
Purpose	Location
VGA pass-through port	CN2

Continued on next page...

PIXELWORKS, INC.  
ULTRA CLIPPER/MCA (UM1280), ULTRA CLIPPER/MCA (UM1024)

...continued from previous page

MONITOR SYNC MODE SELECTION				
Mode	SW2/1	SW2/2	SW2/3	SW2/4
3	On	On	Off	Off
4	On	Off	Off	Off
5	Off	Off	On	Off

MISCELLANEOUS TECHNICAL NOTE
These two cards are attached at the corners and must be installed in two adjacent slots simultaneously. When viewed from the backplate end, the card on the left is the card pictured above.