


BEST UNION ELECTRONICS CO., LTD.

MM AUDIO TELEPHONY 3100

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Game/MIDI port, line in, line out, microphone, telephone
Data Bus	16-bit ISA
Floppy drives supported	None

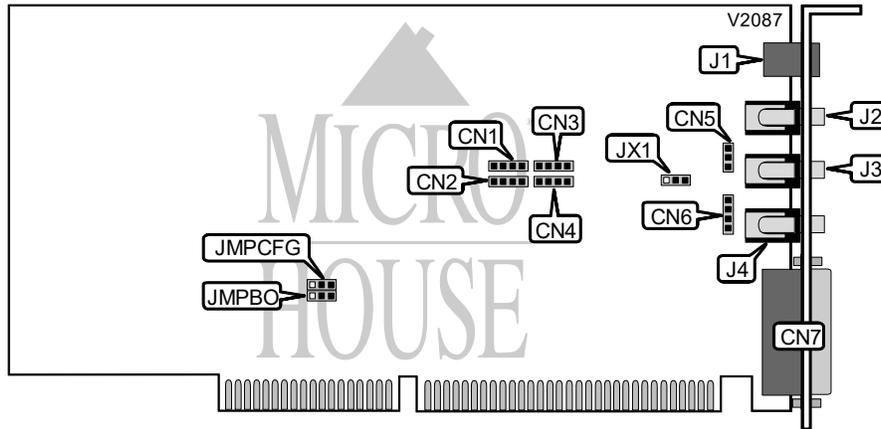

CONNECTIONS			
Function	Label	Function	Label
4-pin connector	CN1	Game/MIDI port	CN7
4-pin connector	CN2	Telephone	J1
4-pin connector	CN3	Line in	J2
4-pin connector	CN4	Microphone	J3
3-pin connector	CN5	Line out	J4
4-pin connector	CN6		

Note: The exact function & purpose of CN1 - CN6 is unidentified.

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í I/O port address is 220h - 22Fh	JMPBO	Pins 1 & 2 closed	
I/O port address is 240h - 24Fh	JMPBO	Pins 2 & 3 closed	
í EEPROM hardware settings enabled	JMPCF G	Pins 1 & 2 closed	
EEPROM hardware settings disabled	JMPCF G	Pins 2 & 3 closed	
í Condenser microphone select	JX1	Pins 1 & 2 closed	
Carbon microphone select	JX1	Pins 2 & 3 closed	