


ACCULOGIC, INC. SIMPLY-RAM

Card Type Memory card
Maximum Onboard Memory 8MB DRAM
I/O Options Serial port, parallel port (both on daughterboard)
Data Bus 8/16-bit ISA

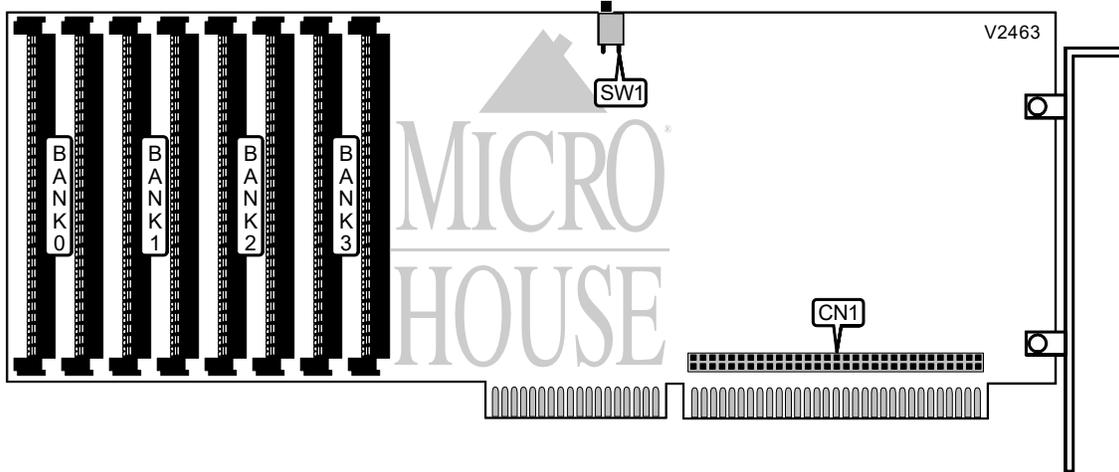

CONNECTIONS	
Function	Label
I/O daughterboard header	CN1

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Operate mode	SW1	On
Reset mode	SW1	Off

Note: SW1 should be turned on for only one SIMPLY-RAM board per system.

RAM				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	None	None	None
2.5MB	(2) 1M x 9	(2) 256K x 9	None	None
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	None
3.5MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	None	None
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	None
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
6.5MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9			