


EMULEX CORPORATION SHORT PORT COLOR CARD COMPOSITE VIDEO

Card Type	Video card
Video Chip Set	Unidentified
Highest Resolution Supported	640 x 200
Maximum Video Memory	Unidentified
Data Bus	8-bit ISA
Video Types Supported	CGA

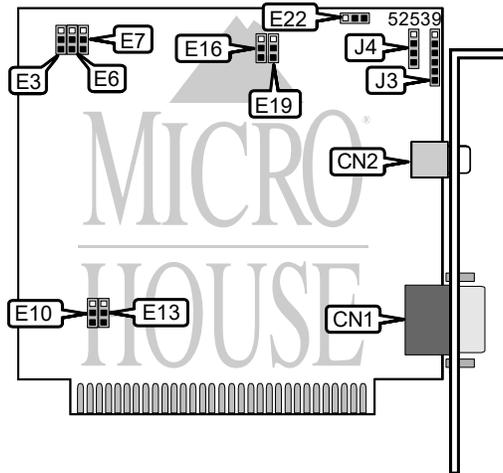

CONNECTIONS			
Function	Label	Function	Label
9-pin digital video port	CN1	Light pen connector	J3
RCA jack	CN2	RF connector	J4

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	E3	Unidentified	
í Factory configured - do not alter	E6	Unidentified	
í Factory configured - do not alter	E7	Unidentified	
Interface selected at Centronics	E16	Pins 2 & 3 closed	
Interface selected at Dataproducts	E16	Pins 1 & 2 closed	
Directional control internal	E19	Pins 2 & 3 closed	
Directional control external	E19	Pins 1 & 2 closed	
Bidirectional mode enabled	E22	Pins 2 & 3 closed	
Bidirectional mode disabled	E22	Pins 1 & 2 closed	

PARALLEL PORT RANGE SELECTION			
Range	E10		E13
Enabled	Pins 2 & 3 closed		Pins 2 & 3 closed
í 0	Pins 2 & 3 closed		Pins 2 & 3 closed
1	Pins 2 & 3 closed		Pins 1 & 2 closed
2	Pins 1 & 2 closed		Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed		Pins 1 & 2 closed

Continued on next page. . .

EMULEX CORPORATION SHORT PORT COLOR CARD COMPOSITE VIDEO

. . . continued from previous page

PARALLEL PORT INTERRUPT SELECTION	
IRQ	E28
IRQ7	Pins 1 & 2 closed
IRQ5	Pins 2 & 3 closed
Note: The location of E28 is unidentified	