


NATIONAL DESIGN, INC.

AT600 PLUS

Card Type	Video card
Video Chip Set	S3, Inc.
Maximum Video Memory	1MB VRAM
Video Types Supported	VGA, XVGA, EGA, CGA, Monochrome
Highest Resolution Supported	1280 x 1024
Data Bus	16-bit ISA

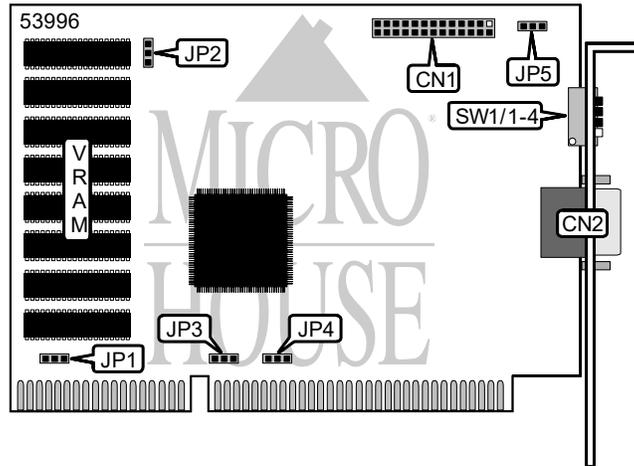

CONNECTIONS			
Function	Label	Function	Label
VGA feature connector	CN1	15-pin analog video port	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Turbo disabled	SW 1/3	Off	
Turbo enabled	SW 1/3	On	
í Factory configured - do not alter (VRAM)	JP1	Unidentified	
í Factory configured - do not alter (engine speed)	JP2	Unidentified	
í IRQ9 interrupt disabled	JP4	Off	
IRQ9 interrupt enabled	JP4	On	
í Factory configured - do not alter (monitor ID)	JP5	Unidentified	

WAIT STATE SELECTION		
Setting	JP3	
í Disabled	Off	
Enabled	On	

Note: SW/3 must be set to the on position to enable zero wait state.

MONITOR CONFIGURATION SELECTION			
Setting	SW1/1	SW1/2	
VGA, XVGA	Off	Off	
Multi-Sync, 38KHz	Off	On	
Multi-Sync, 48KHz	On	Off	
Multi-Sync, 64KHz	On	On	