


SEALEVEL SYSTEMS, INC.

SIO-485

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial port
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length, full-height

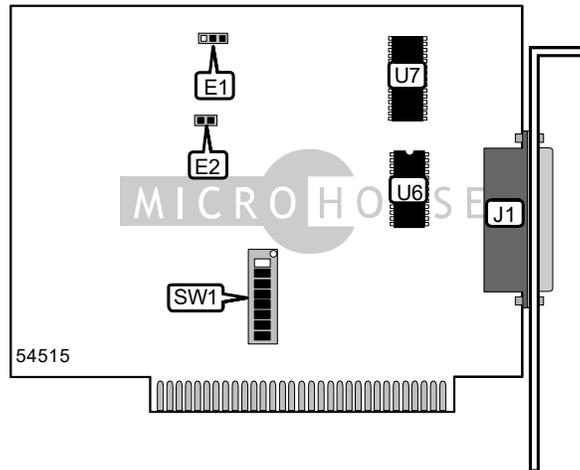

CONNECTIONS	
Function	Label
Serial Port 1	J1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
RS-485 enabled by RTS	E2	Closed
RS-422/485 always enabled	E2	Open

Note: For the RS-422 and the RS-485 ports, the RS-422/485 driver/receiver pair are installed at U6 and U7.

BASE I/O ADDRESS SELECTION PORT 1								
Setting	SW 1/1	SW 1/2	SW 1/3	SW 1/4	SW 1/5	SW 1/6	SW 1/7	SW 1/8
238h	On	Off						
2B8h	Off	On	Off	Off	Off	Off	Off	Off
338h	Off	Off	On	Off	Off	Off	Off	Off
3B8h	Off	Off	Off	On	Off	Off	Off	Off
278h	Off	Off	Off	Off	On	Off	Off	Off
2F8h	Off	Off	Off	Off	Off	On	Off	Off
378h	Off	Off	Off	Off	Off	Off	On	Off
3F8h	Off	On						
Disabled	Off							

Continued on next page . . .

. . . continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION		
IRQ	E1/Pins 1 & 2	E1/Pins 2 & 3
IRQ3	Closed	Closed
IRQ4	Open	Closed
None	Open	Open