


OLIVETTI M 3 8 0 - 4 0

Processor	80386DX
Processor Speed	33MHz
Chip Set	Unidentified
Max. Onboard DRAM	52MB
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	Parallel port, PS/2 mouse port, serial port, riser card, VGA port
NPU Options	80387DX/3167

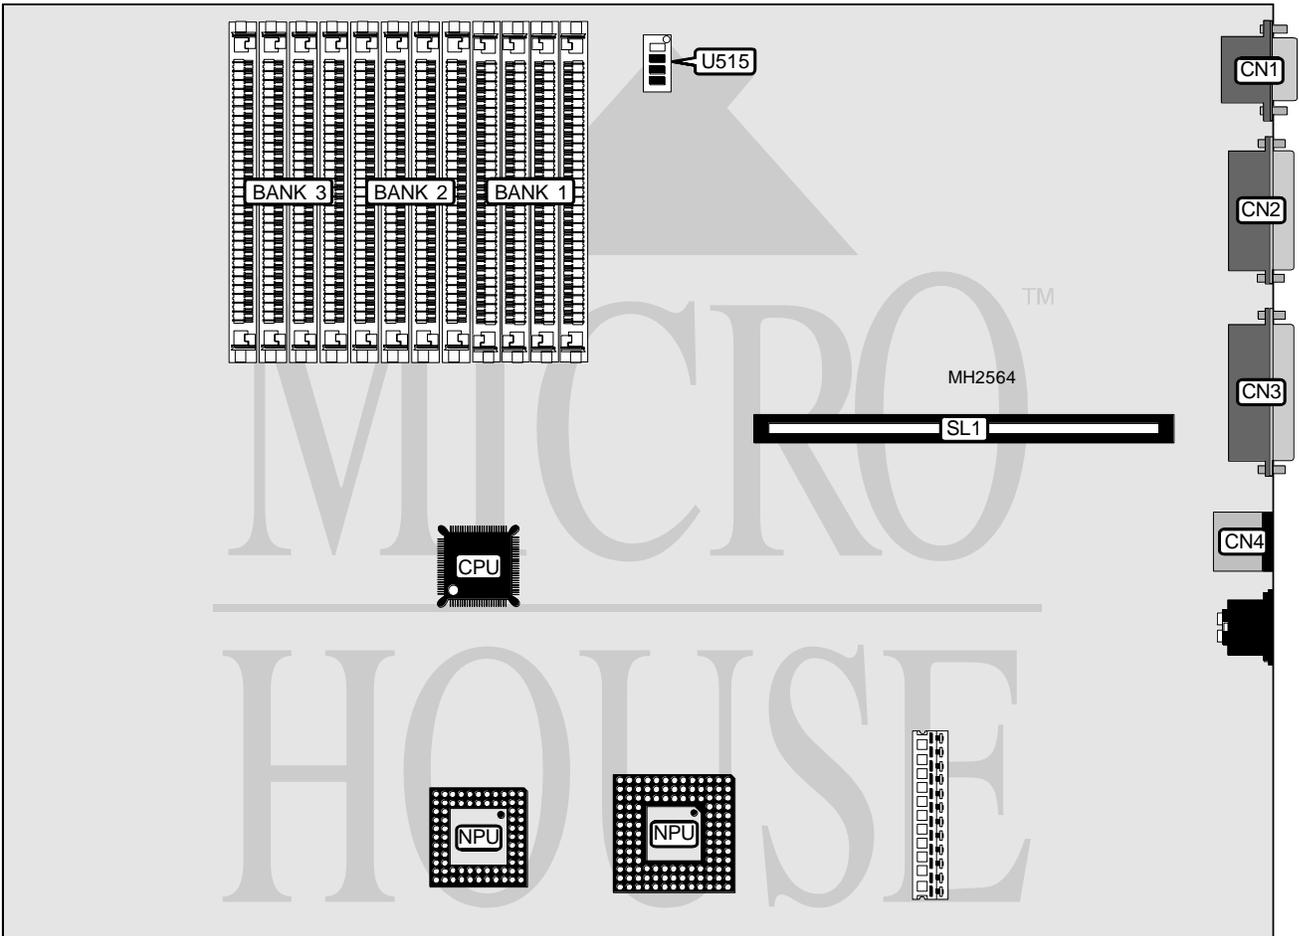

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	PS/2 mouse port	CN4
Serial port	CN2	Riser Card	SL1
Parallel port	CN3		

Continued on next page. . .

OLIVETTI

M 3 8 0 - 4 0

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Read/write functions through serial port enabled	U515/1	Off
Read/write functions through serial port disabled	U515/1	On
í Setup entry enabled	U515/2	Off
Setup entry disabled	U515/2	On
í Read/write functions through floppy drive enabled	U515/3	Off
Read/write functions through floppy drive disabled	U515/3	On
í Factory configured - do not alter	U515/4	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	4MB	NONE	NONE	NONE
5MB	4MB	(4) 256K x 9	NONE	NONE
6MB	4MB	(4) 256K x 9	(4) 256K x 9	NONE
7MB	4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
8MB	4MB	(4) 1M x 9	NONE	NONE
9MB	4MB	(4) 256K x 9	(4) 1M x 9	NONE
10MB	4MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9
12MB	4MB	(4) 1M x 9	(4) 1M x 9	NONE
13MB	4MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9
16MB	4MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
21MB	4MB	(4) 4M x 9	(4) 256K x 9	NONE
22MB	4MB	(4) 4M x 9	(4) 256K x 9	(4) 256K x 9
24MB	4MB	(4) 4M x 9	(4) 1M x 9	NONE
37MB	4MB	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9
40MB	4MB	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9
52MB	4MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

Note: Bank 0 is factory installed. The location is unidentified.