


CMS ENHANCEMENTS, INC.

ESP SX386M

Processor	80386SX
Processor Speed	16MHz
Chip Set	Unidentified
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	254mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, serial ports (2)
NPU Options	80387SX

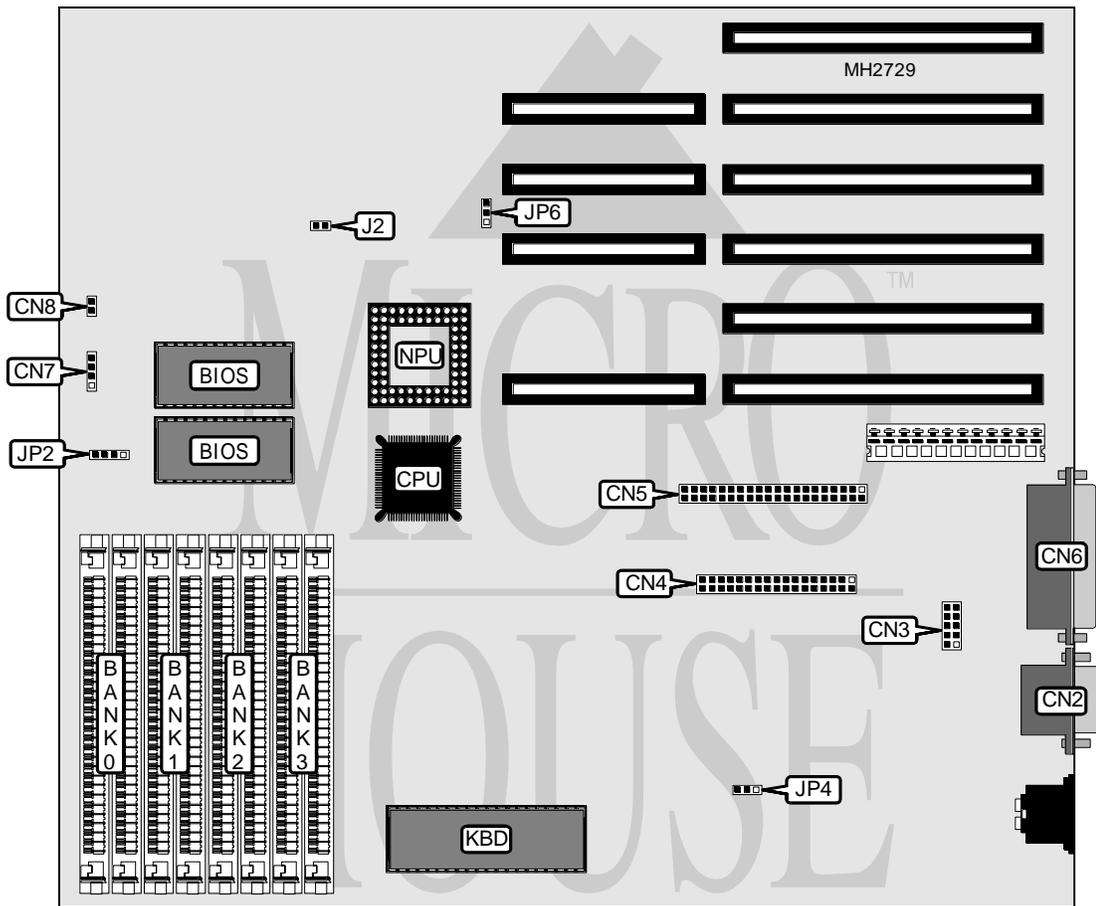

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN2	Parallel port	CN6
Serial port 2	CN3	Indicator board interface	CN7
Floppy drive interface	CN4	Speaker	CN8
IDE interface	CN5	IDE interface LED	JP2

Continued on next page. . .

CMS ENHANCEMENTS, INC.
ESP SX386M

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU disabled	J2	Open
NPU enabled	J2	Closed
í Parallel port LPT select LPT1	JP4	pins 1 & 2 closed
Parallel port LPT select LPT2	JP4	pins 2 & 3 closed
í Monitor type select monochrome	JP6	pins 1 & 2 closed
Monitor type select color	JP6	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
640KB	(2) 256K x 9	(2) 64K x 9	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			